


SPECIFICATION CONTROL DRAWING

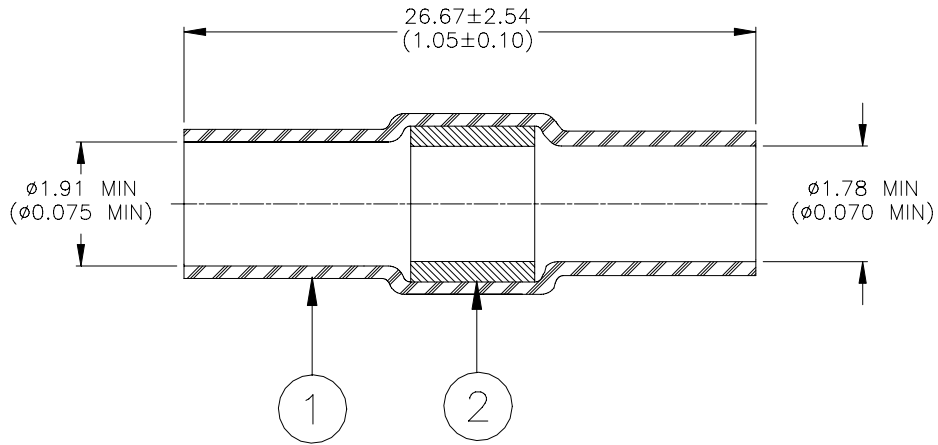

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
Maximum Recovered I.D. - 0.76 (0.030)
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn63 per ANSI J-STD-006.
 - FLUX: TYPE ROL1 per ANSI-J-STD-004.
 - WEIGHT: 13 mg. min.

APPLICATION

1. This part is designed for splicing tin or silverplated solid conductors having a combined diameter between 0.51 (0.020) and 1.78 (0.070) when twisted together.
2. Parts may be installed with convection or infrared heat sources.
3. Wires are to be stripped 17.15 - 19.69 (0.675 - 0.775) and twisted together.

tyco <i>Electronics</i>	Tyco Electronics Corporation 300 Constitutional Drive Menlo Park, CA 94025 USA	RAYCHEM	TITLE: SOLDERSLEEVE CONDUCTOR SPLICING 1.78 (0.070) I.D.				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: D-110-35				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DATE: 22-Mar-00	DOC ISSUE: 1			
DRAWN BY: M. FORONDA	REPLACES: N/A	DCR NUMBER: D000143	PROD. REV.: J	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.